



Smart, Efficient, Built to Grow, Trusted Tech, ReGasPro!

# 108,000 SCFH Ambient Vaporizer


## Model HBVP-108K



Modular



Stackable

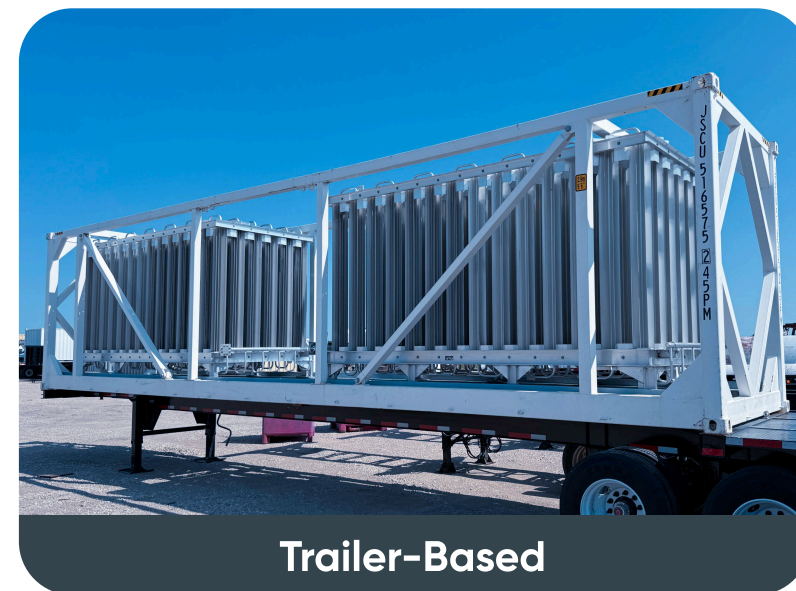

Trailer-Based

### Specifications

|                       |                    |
|-----------------------|--------------------|
| ★ Packager            | ReGasPro           |
| ★ Model               | HBVP-108K          |
| ★ Condition           | New                |
| ★ Flow Rate           | Up To 108,000 SCFH |
| ★ Max Design Pressure | 700 psi            |
| ★ Service             | LOX, LIN, LAR, LNG |
| ★ Design              | -320F              |
| ★ Base                | 40 FT. ISO Frame   |

### Description

Mobile ambient cryogenic vaporizers for sale or lease to simplify operation and integrate seamlessly with cryogenic tanks for reliable and efficient regasification of cryogenic liquids to gas. Units capable of vaporizing LOX, LIN, LAR, LNG.

- ✓ "Plug and Play Solution" - simply connect, no welding required
- ✓ No External Power Source Required
- ✓ Designed to operate in series or to alternate between vaporizers
- ✓ Lifting Provisions for Forklift and Crane
- ✓ Standard 40-ft ISO Locking Footprint for Easy Transport


This is a very simple setup for your cryogenic regasification project needs.

\*\*\*Optional components include regulators, pumps, odorizers, meters and more.

### Dimensions

- ★ Size: 40' L x 8' W x 9' 7" H
- ★ Weight: 12,230 lb
- ★ Footprint: 40' ISO Frame Design

### Capacity of HBVP-108K

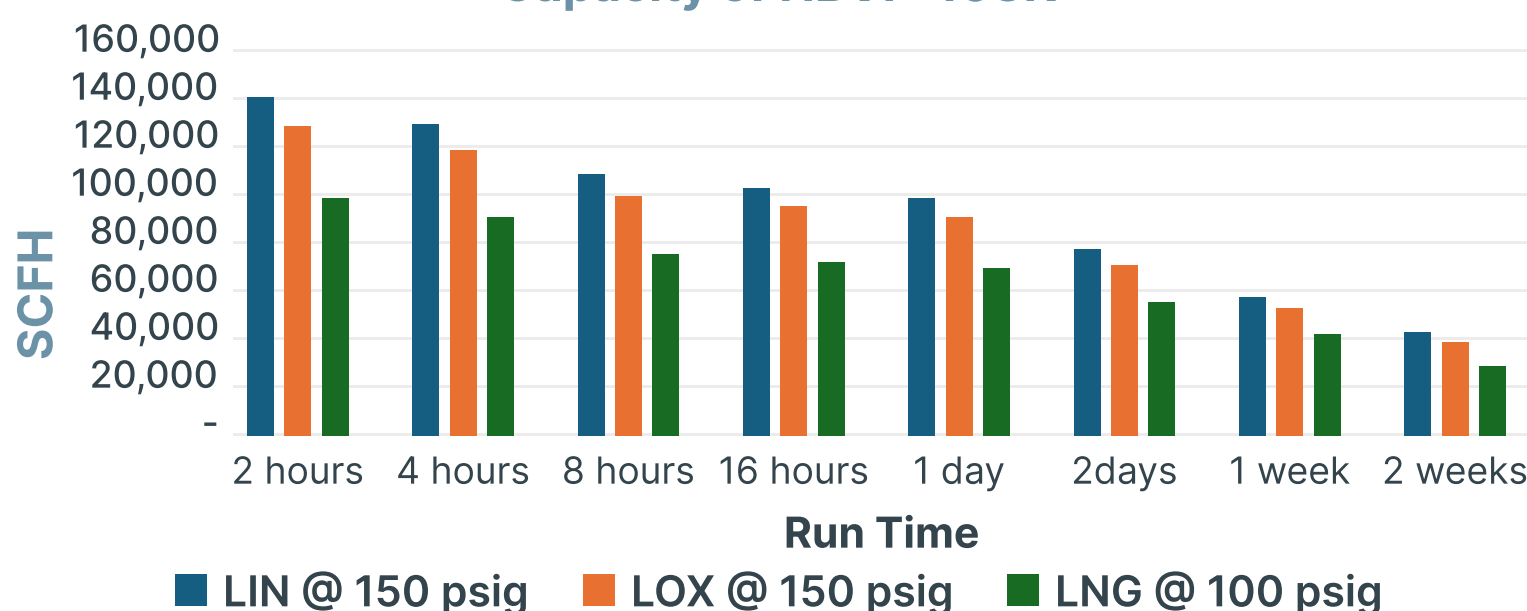



### Mechanical

- ★ All aluminum construction
  - ✓ Alloy 6063 extrusions
  - ✓ Alloy 6061 structural
  - ✓ Alloy 6061, 5052 piping components
  - ✓ Welded base; crimped fin array for thermal flexibility
- ★ Wide 12-inch center to center fin spacing; 4-inch gap
- ★ Combination of 8-fin and 16-fin, 8-inch diameter extrusions with internal fins
- ★ 1-1/2"/2" ANSI CL300 RF W/N Flange Connections

### Design

- ★ Certified for U.S. & Canadian Use
- ★ Built to ASME B31.3 compliance standards
- ★ MAWP – up to 700 psig
- ★ Outlet temperature: 20°F approach to ambient
- ★ Seismic design compliant with ASCE/SEI 7
- ★ Wind load: Designed per ASCE/SEI 7; 120 mph
- ★ Units cleaned, sealed, and tagged for oxygen



Leasing & Financing  
Options are Available

/ For more info please visit  
[www.ReGasPro.com](http://www.ReGasPro.com)

/ Our Address

ReGasPro  
1501 FM 66,  
Waxahachie, TX 75167

/ Contact Us

+1 (800) 716-6747  
[info@regaspro.com](mailto:info@regaspro.com)  
[info@gasequipmentforsale.com](mailto:info@gasequipmentforsale.com)